


# UPK

## Extract-air grille

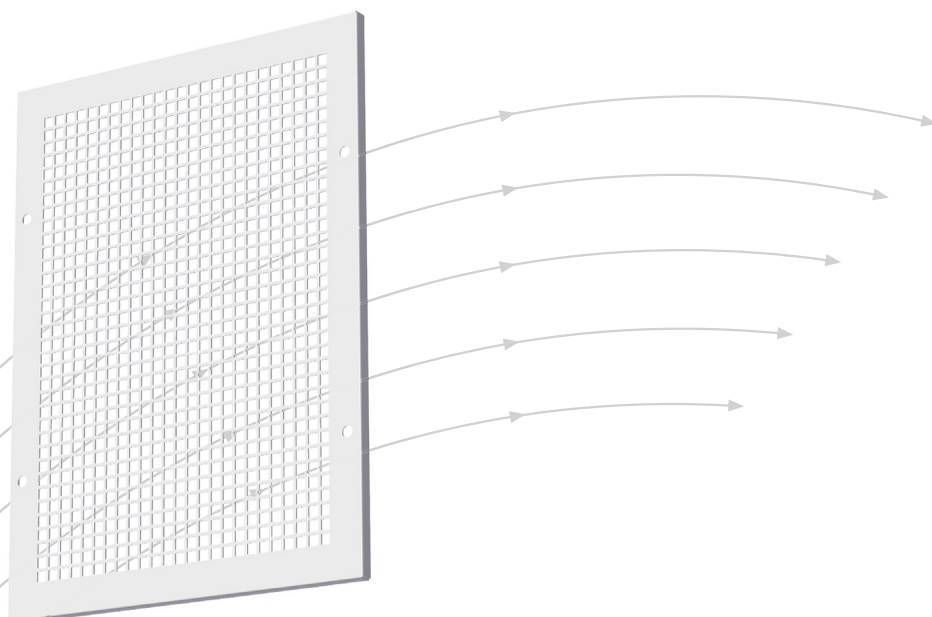

- Bespoke dimensions, BxH variants
- Available with and without plenum box

**TROX<sup>®</sup> TECHNIK**

 **Auranor**

TROX Auranor Norge AS

PO Box 100  
NO-2712 Brandbu

Telefon +47 61 31 35 00  
Telefaks+47 61 31 35 10  
e-mail: [firmapost@auranor.no](mailto:firmapost@auranor.no)  
[www.trox.no](http://www.trox.no)

# UPK (BxH)

## APPLICATION

UPK is an air-extract grille for wall mounting. It is available in bespoke dimensions and can thus be adapted to fit various groove dimensions or pre-installed boxes.

## DESIGN

The UPK features square perforation. It is available with pre-drilled holes and enamelled screws. Grilles exceeding 2 m<sup>2</sup> are split.e.

## MATERIALS AND SURFACE COATING

The grill is made in steel, and comes in a RAL 9003 - gloss 30 finish. It is fitted with polyurethane moulding. Other materials and colours are available on request.

## QUICK SELECTION

In terms of projected WxH for the UPK, duct velocity should not exceed 3 m/s. This is to avoid any noise issues.

## ORDER CODE, UPK

Product **UPK - 800 - 900 / 0** SL = Special finish  
B = Width from and incl. 100, max. 2000 (1000)  
H = Height from and incl. 100, max. 1000 (2000)  
(Max. area in total: 2 m<sup>2</sup> per grille)

Example:  
UPK-800-900 / 0  
Explanation:  
UPK, width: 800 and height: 900

## DIMENSIONS AND WEIGHT, UPK


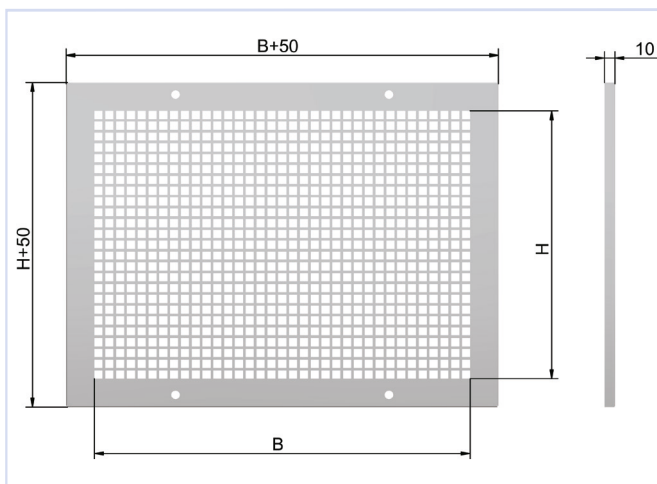


Fig. 1

UPK is developed and manufactured by:

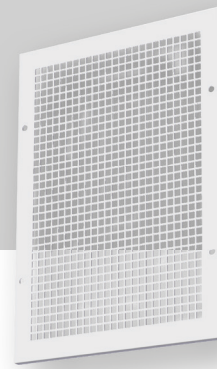

## INSTALLATION

Installation principle is shown in fig. 2.

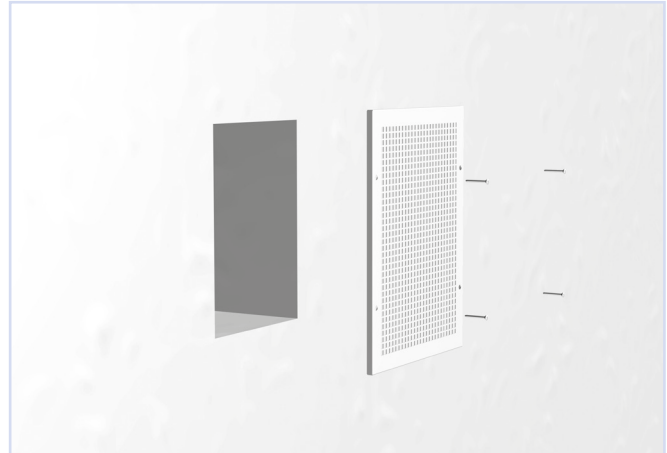


Fig. 2: Installation

## COMMISSIONING

A separate measurement and adjustment unit for commissioning is recommended.

## MAINTENANCE

The valve can be cleaned by using a damp cloth.

## ENVIRONMENT

Enquiries regarding product declaration can be directed to our sales team, or information can be found at our website: [www.trox.no](http://www.trox.no)

The company reserves the right to make amendments without prior notice.