

**Reflexomat Basic vessel, RG 5000,  
grey, 10 bar, for Reflexomat press. unit  
Article-No.:8651705**



Reflex Reflexomat Basic Vessel RG, expansion vessel with replaceable bladder equipped for the installation of a 'reflexomat' control unit, for closed heating and cooling systems, built acc. to EN 13831, approval acc. to EU Pressure Equipment Directive 97/23/EC.

safety relief valve, level transducer (tank volume).

Vessels stand vertical with steel profile or tubular feet


Vessel manufactured of steel with red anti corrosion paint protection. In order to prevent interior corrosion due to the presence of condensed water, the vessel is provided on the inside with an epoxy coating with a minimum thickness of 70µm.

The high quality butyl bladder is preventing the vessel contents from permeation of oxygen.

Vessel supplied with expansion joint,

## **Merkmale**

Type: RG 5000  
Nominal volume: 5000 l  
Useful volume max.: 4500 l  
perm. flow temp supp. inst.: 120 °C  
perm. op. temp. diaphragm: 70 °C  
perm. op. overpressure: 10 bar  
SV set pressure exp. vessel: 10 bar  
Diameter: 1500 mm  
Height: 3642 mm  
Net weight: 1286 kg  
System connection: DN 65/PN 16  
Colour: grau

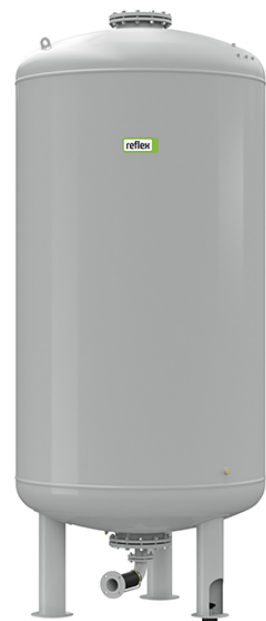

### **Reflex Winkelmann GmbH**

Gersteinstraße 19 • 59227 Ahlen, Germany • Postfach 2261 • 59210 Ahlen, Germany • Tel.: + 49 2382 7069-0 • Fax: + 49 2382 7069-588 • [www.reflex.de](http://www.reflex.de)  
Geschäftsführer: Norbert Hülsmann, Volker Mauel  
USt.-Ident-Nr.: DE 178 726 058 • Steuer-Nr.: 304/5987/2077 • Handelsregister: Amtsgericht Münster • HRB 13297, Sitz: Ahlen