

**Reflex Fillset with contact water meter  
for water make-up  
Article-No.:6811205**

**reflex**


Reflex Fillset with contact water meter, prefabricated assembly with wall bracket for the direct connection of make-up units for heating and cooling systems with the drinking water mains.

Consists of:

- two isolation ball valves
- type BA backflow preventer (RPZ valve) according to DIN 1988/T4 (EA) respectively EN 1717 (BA), provided with integrated dirt strainer
- water meter with voltfree pulse output
- wall bracket supplied for horizontal mounting

## **Merkmale**

Type: I 0,8  
max. operating pressure: 10 bar  
max. operating temperature: 60 °C  
Flow Value kvs: 0,8 m3/h  
Reed contact cycle: 1 per 10 l  
Connection cable: 2x0,14 mm2, 1,5m long  
max. switching capacity: 4 W DC  
Net weight: 1,7 kg  
Length: 293 mm  
Connection Inlet: 293 mm  
Outlet: G 1/2

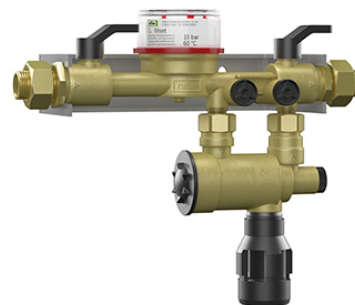

### **Reflex Winkelmann GmbH**

Gersteinstraße 19 • 59227 Ahlen, Germany • Postfach 2261 • 59210 Ahlen, Germany • Tel.: + 49 2382 7069-0 • Fax: + 49 2382 7069-588 • [www.reflex.de](http://www.reflex.de)  
Geschäftsführer: Norbert Hülsmann, Volker Mauel  
USt.-Ident-Nr.: DE 178 726 058 • Steuer-Nr.: 304/5987/2077 • Handelsregister: Amtsgericht Münster • HRB 13297, Sitz: Ahlen